

TLC™



THE LEATHER COMPANY



ANTI SCRATCH LEATHER



Hamilton
COLLECTION



SR.NO.01



SR.NO.02



SR.NO.03



SR.NO.04



SR.NO.05



SR.NO.06




SR.NO.07



SR.NO.08



Hamilton
COLLECTION

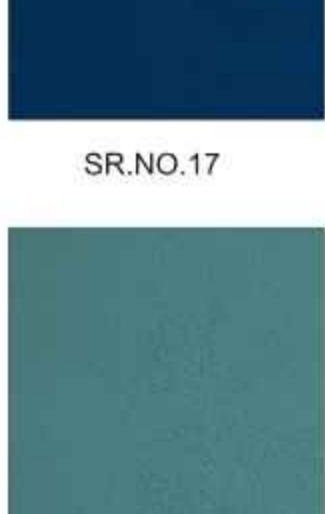

SR.NO.09



SR.NO.10



SR.NO.11



SR.NO.12




SR.NO.13



SR.NO.14



SR.NO.15

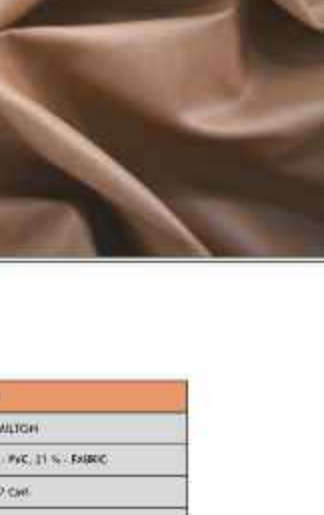


SR.NO.16



SR.NO.17



SR.NO.18



SR.NO.19



SR.NO.20

SR.NO.21

FEATURES

- Color fastness to rubbing
- High Pk. Abrasion
- Anti Dry Free
- High Tear Strength
- Wear Resistant
- Color fastness to rubbing
- Leather Touch
- Heavy Metal Free

CLEANING INSTRUCTIONS

- Clean regularly with damp cloth or sponge
- Use water only for a mild detergent should not be used with water
- Do not use volatile solvents such as acetone or turpentine cleaning products

WASHING CARE

- Machine Washable
- Ironable
- Dry Clean
- Washable
- Washable
- Washable



COLLECTION	WEIGHT	SP	WT	WATERPROOF	WAF
HAMILTON	2800GM	1800	12%	90%	87%



MARKETED BY



+91 94476 67660

www.inlifefurnishings.com

TEST REPORT		
COLLECTION	HAMILTON	
COMPOSITION	74% PU, 77% PVC, 21% FABRIC	
WIDTH	157 CM	
GA	300-315	
HORIZONTAL RIP	PUH	
VERTICAL RIP	PUH	
TEST RESULT		
ATTRIBUTE	TEST METHOD	RESULT
ABRASION RESISTANCE	ISO 24543	10000
WYOMING ABRASION OF LEATHER - PUH	ASTM D4137	2400
HAULT TEST	ASTM F4242	37000
EXTENSION BY BREAK	ISO 17084-2	765
TENSILE TENSILE STRENGTH	ISO 17084-3	660
STITCH TENSILE STRENGTH (ST)	ISO 17084-3	900
TEAR STRENGTH	ISO 17084-3	900
TEAR STRENGTH (TE)	ISO 17084-3	900
US-SCUFF TEST	ASTM D4137	8000
STITCH TENSILE STRENGTH (ST)	ASTM D4137	900
FLAME RETARDANCE	ASTM E84	W1
	UL 94	W1
	ISO 17084-3	W1
	ISO 17084-3	W1